


FORM PTO-1390 (REV 10-94)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		DOCKET #: 4925-196PUS
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				
				U.S. APPLICATION NO. 10 030609 (10/03/06) (371) (US)
INTERNATIONAL APPLICATION NO. PCT/EP00/04147		INTERNATIONAL FILING DATE 10 May 2000		PRIORITY DATE CLAIMED 10 May 2000
TITLE OF INVENTION Method for an Automatic Allocation of IP Addresses				
APPLICANT(S) FOR DOBEOUS Mika AALTO; Tamas MAJOR				
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:				
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). Unexecuted 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 				
Items 11. to 16. Below concern other document(s) or information included:				
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.				
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.				
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.				
<input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.				
14. <input type="checkbox"/> A substitute specification.				
15. <input type="checkbox"/> A change of power of attorney and/or address letter.				
16. <input checked="" type="checkbox"/> Other items or information (<i>specify</i>). PCT Publication Sheet, Int'l Search Report, Notice Informing the Applicant of the Communication of the International Application to the Designated Offices, PCT Request, Letter to WIPO notifying of a change in name of applicant.				

U.S. APPLICATION NO. 10/030609		INTERNATIONAL PCT/EP00/04147		531 Res'd PCT, 09 JAN 2002 ATTORNEY'S FEE \$4925-196PUS	
17.[x]The following fees are submitted:					
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO\$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482).\$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$	890
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(c)).				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	20 - 20 =		x \$18.00	\$	
Independent Claims	1 - 3 =		x \$84.00	\$	
Multiple dependent claim(s) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	890
Reduction of 1/2 for filing by small entity, if applicable.				\$	
SUBTOTAL =				\$	890
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	890
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by the appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED				\$890	
Amount to be refunded:				\$	
charged:				\$	
a. [x]One check in the amount of \$ 890 to cover the above fee is enclosed. b. [] Please charge my Deposit Account No. 03-2412 in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [x]The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 03-2412. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: <u>Michael C. Stuart</u> Cohen, Pontani, Lieberman & Pavane 551 Fifth Avenue, Suite 1210 New York, New York 10176			 <u>Michael C. Stuart</u> Registration Number: 35,698 January 9, 2002 Tel: (212) 687-2770		

10030609 042902

10/030609

531 Rec'd PCT/ 09 JAN 2002

By Express Mail # EV052762966US - January 9, 2002

Attorney Docket # 4925-196PUS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Phase PCT Application of

Mika AALTO et al.

International Appln. No.: PCT/EP00/04147

International Filing Date: 10 May 2000

For: Method for an Automatic Allocation of IP
Addresses

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents

Washington, D.C. 20231

BOX PCT

S I R:

Prior to examination of the above-identified application please amend the
application as follows:

IN THE SPECIFICATION:

Page 1, before line a, the paragraph "The invention relates", insert the following
heading:

~~--FIELD OF THE INVENTION--~~

By Express Mail # EV052762966US · January 9, 2002

Page 1, before line 12, the paragraph "The use of networks", insert the following heading:

--BACKGROUND OF THE INVENTION--

Page 3, before line 15, the paragraph "It is an object", insert the following heading:

--SUMMARY OF THE INVENTION--

Page 3, delete lines 20 to 26, the two paragraphs "The object is reached" and "On the other hand", and insert therefor:

--The method of the present invention is for an automatic assignment of IP (internet protocol) addresses to the interfaces of network elements, especially routers, having at least two interfaces, by one of which they are newly connected, either directly or via other network elements, to a server of an IP based network. In the method, the new network element checks which of its interfaces is connected to the server. The new network element sends a configuration request via its interface linked to the server. The server of the network receives the request, chooses and reserves as many IP addresses as needed for the new network element, and sends out a response with said IP addresses to the new network element. The new network element receives the IP addresses and applies them on its interfaces requiring an address. The present invention also comprises an internet protocol (IP) network comprising at least one server and network elements with more than one interface, in particular routers, which are suitable for employing the above described method.--

By Express Mail # EV052762966US - January 9, 2002

Page 4, delete lines 15 to 16, the paragraph "Advantageous embodiments".

Page 7, before line 17, the paragraph "In the following", insert the following paragraph and heading:

--Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are intended solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS--

Page 8, before line 1, insert the following heading:

--DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS--

Page 16, after line 3, (last line), insert the following paragraph:

-- Thus, while there have been shown and described and pointed out fundamental novel features of the present invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices described and illustrated, and in their operation, and of the methods described may be made by those skilled in the art without departing from the spirit of the present invention. For example, it is expressly intended that all combinations of those elements and/or method steps which perform substantially

By Express Mail # EV052762966US - January 9, 2002

the same function in substantially the same way to achieve the same results are within the scope of the invention. Substitutions of elements from one described embodiment to another are also fully intended and contemplated. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.--.

Page 17, delete "CLAIMS" and insert therefor --What is claimed is:--.

IN THE CLAIMS:

Amend claim 8 to read as follows:

8. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 1.

Add the following new claims:

15. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 2.

16. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 3.

By Express Mail # EV052762966US - January 9, 2002

17. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 4.

18. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 5.

19. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 6.

20. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to claim 7.

By Express Mail # EV052762966US - January 9, 2002

REMARKS

This preliminary amendment is presented to place the application in proper form for examination and to eliminate multiple dependency from the present claims. No new matter has been added. Early examination and favorable consideration of the above-identified application is earnestly solicited.

Any additional fees or charges required at this time in connection with the application may be charged to our Patent and Trademark Office Deposit Account No. 03-2412.

Respectfully submitted,
COHEN, PONTANI, LIEBERMAN & PAVANE

By: _____



Michael C. Stuart
Reg. No. 35,698
551 Fifth Avenue, Suite 1210
New York, N.Y. 10176
(212) 687-2770

9 January 2002

10030609 .042902
10/030609
531 Rec'd PCT 09 JAN 2002
By Express Mail # EV052762966US · January 9, 2002

AMENDMENTS TO THE SPECIFICATION AND CLAIMS SHOWING CHANGES

The claims have been amended as follows:

8. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to **[one of claims] claim 1 [to 7]**.

SC/wy/pw 990731WO
08. May 2000

**Method for an automatic assignment of IP addresses and IP
based network**

The invention relates to a method for an automatic assignment of IP (internet protocol) addresses to the interfaces of network elements, especially routers, having at least two interfaces, by one of which they are newly connected, either directly or via other network elements, to a server of an IP based network. The invention equally relates to an IP (internet protocol) network comprising at least one server and network elements with more than one interface. It is understood that an IP address may be an IP host address, identifying one dedicated IP host, as well as an IP network address.

The use of networks based on the internet protocol (IP) are well known in the state of the art. Such networks are built up of different network elements, two important element types in a typical IP based network being hosts and routers. Servers may be included to serve the different network elements. A host constitutes the access for a user and has typically one interface, which connects the host to a logical IP subnetwork (LIS), i.e. the host is a member of the LIS. A member of a LIS can send IP packets directly to all other members of the same LIS. If a network element wants to communicate with other network element and the two network elements are not members of a same LIS, then there must be one or more routers between the two LISs. A router is a network element, which forwards IP packets between different LISs. Typically a router has more than one physical

- 2 -

interface, because the LISs typically represent also physically separated networks. The physical networks connected by the routers represent subnetworks of the whole IP network, and normally each subnetwork has its own network address.

Every host in an IP based network is assigned an IP address. The address format is comprised of a network address and a local or host address. The network address identifies the IP subnetwork to which the host is attached. The local address is a unique local address within the IP subnetwork. Using the IP addresses, two hosts on the same IP subnetwork can send packets directly to each other. Two hosts on different IP subnetworks cannot send IP packets directly to each other, instead the packets have to go via the router connecting the two subnetworks. For the routers, there can be provided an IP address for every interface, the IP address being composed again of the network address of the subnetwork, to which the interface belongs, and of a local address identifying the interface in the subnetwork. All interfaces with a dedicated IP address are numbered interfaces. For the interfaces which belong to a point-to-point link to other network elements, the assignment of a dedicated IP address is possible but not necessary, i.e. these interfaces may be numbered or unnumbered.

Typically, an IP network has a large number of hosts and the number of hosts in each subnetwork can change.. Equally, the number of other network elements can vary, for example, the number of routers when new subnetworks are to be added. In addition, the available IP address space is usually limited and should be used efficiently. In order to take such developments into account, the IP

- 3 -

network needs human intelligence when it comes to planning.

In the state of the art, the Dynamic Host Configuration Protocol (DHCP) is used for configuring new network elements with only one interface, especially hosts, with information from DHCP servers, which maintain a database with IP addresses. A new host searches a DHCP server and requests an IP address. In case there is a router between the host and the DHCP server, the router must have DHCP relay functionality. This method reduces the work necessary to administer an IP network. It is not known, however, how to facilitate the assignment of IP addresses and IP network addresses to new network elements with more than one interface.

It is an object of the invention to provide a method and an IP based network which minimise the necessary manual configuration when a network elements with at least two interfaces, in particular a router, is newly connected to an IP based network.

This object is reached on the one hand with the method of claim 1.

On the other hand, the object is reached by an IP (internet protocol) network comprising at least one server and network elements with more than one interface, in particular routers, which are suitable for employing the method according to one of claims 1 to 7.

The invention proceeds from the idea that, if the IP network has some known restrictions, the automatic assignment of IP addresses to network elements with more than one interface is essentially facilitated. The

- 4 -

invention is applicable in networks that do not require hierarchical addressing, e.g. because they are rather small. Moreover, the number of network elements has to be limited and known.

Based on those two restrictions, the method and the IP network of the invention decrease the required amount of planning in an IP based network to a minimum, because it enables the server to automatically choose and reserve IP addresses for a newly connected network element upon request by the network element. Since the distribution of the IP addresses can be carried out efficiently by the server, the address space for the addresses can be set to the minimum needed for the defined maximum number of interfaces.

Advantageous embodiments of the invention can be taken from the subclaims.

In the method according to the invention, the new network element can be connected directly to the server. Alternatively, the new network element, in particular routers, can be connected to the server via other network elements with also at least two interfaces. The other network elements comprise a relay function for the address reservation protocol, the relay function knowing the location, especially the IP address, of the server. Therefore, the other network elements are able to forward the configuration request from the new network element and the response from the server correctly. The two alternatives provide in combination a method suitable for an expansion at any location of the existing IP based network.

- 5 -

The new network element with more than one interface, in particular the router, may start its relay functionality after one first interface is provided with an IP address. The IP address can be dedicated to an interface in case numbered links are used. If numbered links are used, the IP address is not tied to any interface in particular.

Moreover, there might be provided a possibility to include additional information or parameters in the server's response beside the IP address, in particular by the server itself. This has the benefit that more details for the IP configuration of the new network elements or some other parameters for the new network element can be transmitted at the same time. Configurations not to be used for the whole network but being specific to a subnetwork can be achieved by including additional data by the relay of a network element the response has to pass.

In order to be able to exchange routing information, the routers of the network should run a routing protocol, in particular an Open Shortest Path First (OSPF) routing protocol.

If the new network element comprises interfaces for numbered links, in particular for Logical IP Subnetworks (LIS), the new network element requests an IP network address for each of those interfaces from the server. For the interfaces, that are already connected to existing routers, there is no need for such a request.

If the new network element only comprises interfaces for unnumbered links, the new network element preferably requests only one IP host address from the server.

- 6 -

In order to be useable according to the claimed methods, in a preferred embodiment of the IP network of the invention each network element with more than one interface comprises a client for checking if its interfaces are connected, directly or via another network element, to the server and for sending a configuration request to the server. Those network elements further all comprise a relay for forwarding configuration requests coming in via one of the interfaces via another one of the interfaces. The server of the network comprises means for choosing and reserving IP addresses for a network element newly included in the network in response to a received configuration request from this new network element.

In another preferred embodiment of the invention, the IP network uses the Dynamic Host Configuration Protocol (DHCP) for assigning IP addresses to the interfaces of new network elements, especially to IP hosts. The use of the DHCP may be in addition to the claimed methods. This is in particular applicable, when the interface to the existing router is numbered.

Preferably, the server of the IP network of the invention has access to a database, especially a database maintained by the server, indicating which IP addresses are allocated and which IP addresses are available.

With such a database, the server immediately knows, which addresses can be chosen and reserved for new network elements. If a network element is removed from the IP network, the IP addresses of the concerned interfaces should be identified as being available again for future allocations.

- 7 -

In a preferred embodiment of the IP network of the invention the at least one server of the network moreover has access to a database, in particular a DNS (domain name service) database, in which the distributed IP addresses are put into relation with a generic name of the element to which the IP address is assigned. This way, the different interfaces can be addressed easily by a generic name.

In an equally preferred embodiment of the IP network of the invention, the network is made up of point-to-point links between the network elements.

The application of the method of the invention can be seen especially with IP networks using ATM as data link layer. Accordingly, the IP network according to the invention is preferably an IP over ATM network. Still, other suitable networks can be used as well.

In the following, the invention is explained in more detail with reference to drawings, of which

- Fig. 1 shows an ATM network based on IP to which the method of the invention is applicable;
- Fig. 2 shows a part of an IP network with newly connected components;
- Fig. 3 shows a method according to the invention for one of the newly connected components of Fig. 2; and
- Fig. 4 shows a preferred extension of the method of Fig. 3.

In figure 1, an IP network according to the invention can be seen. The components of the network are a server S, and, as network elements, a plurality of routers R, A and a plurality of hosts H. Each host H has one interface, each router at least two interfaces. The server S is located at a central place and connected to one of the routers R. All routers R, A that are not connected directly to the server S are connected to the server S via other routers R. Router A with interfaces I₁ to I₄ has been newly connected to the network.

The network elements are connected either by a point-to-point link or by a Local Area Network (LAN) L, the IP network comprising several of such subnetworks L. To each subnetwork there is assigned an IP network address, which forms part of each IP address of the interfaces belonging to the respective subnetwork. If numbered point-to-point links are used between routers and the LANs have several hosts, then the operator may not want to assign as large IP networks for the point-to-point links as for LANs. The operator may in that case define two subnetwork pools: small subnetworks for point-to-point links and larger subnetworks for LANs. The router requesting a new IP network from the server would then have to know whether it requests a LAN subnet or a point-to-point subnet for an interface. To simplify the server configuration it is therefore preferred to use unnumbered links between routers (i.e. only one pool). On the other hand, if the LANs have one or two hosts, then the subnet size in a LAN and a numbered point-to-point link could be same and one pool would be enough.

The server S is configured accordingly with a pool of subnetworks, all being able to hold the desired number of connected network elements.

- 9 -

Because the server has to know whether a router requests a new IP network for a LAN subnetwork or a point-to-point subnet it is simpler to use only unnumbered links between routers.

In every network element R,A,H there is included a client functionality. The client of a network element newly connected to the existing network is able to request IP addresses for its interfaces. The request is either sent to a router R or a server S connected by a point-to-point link to the requesting network element or broadcast to every node connected to the same subnetwork, depending on the connection of the new network element. Thus the request is received by all directly connected network elements. Each client of a network has an unique identifier (node ID), which enables other elements to identify each client individually. With each request, the node ID is send, such that the request can be associated with the requesting client.

In each network element with more than one interface, i.e. especially in routers, moreover a relay function is integrated. Such a functionality is needed, whenever the client of a network element cannot reach the server S directly. The task of the relay is to listen to all interfaces of its network element, and to take note if there are incoming requests from a connected network element. A received request is directly addressed and sent to one or more servers. The relay may add additional information to the request in order to enable the server S to send the response to the client.

The server S receives a request from a client of a new network element, either directly or via the relay functionality of another network element, chooses an

- 10 -

address, reserves it and sends it to the requesting client. The server also updates a DNS database to which it has access, so that the clients can easily be addressed by name.

If a network element has a point-to-point connection to another network element, an unnumbered link can be used. This means that the link does not have an IP network address and therefore the interfaces do not have to have IP addresses. If the connection between network elements is not a point-to-point connection, but for example a LAN with hosts, a network address is needed for the link and the interfaces of the routers have to have IP addresses.

The configuration of the new router A depends on the kind of links between the routers.

In the network of figure 1, if the links between the routers are unnumbered, the interfaces Ia, Ib and Id of the new router A can be configured to be unnumbered and interface Ic is configured as LIS interface. If it is known that the server can be found only behind an unnumbered link, the new router can try to find the server sending "server discovery" messages to the unnumbered links Ia, Ib, Id, an answer arriving via interface Ia. The router A can then requests IP host addresses or IP network addresses from the server S, depending on the other interface types. The server S can provide any free address from a pool of available addresses. Alternatively, the server S can be configured to provide dedicated addresses according to a node ID in the request message.

In the case of figure 1, the new router A will only request a network address for interface Ic. Other

- 11 -

addresses are not necessary, because the router A can use the IP address in interface Ic. The new router A configures the received IP addresses according to the answer from the server S and starts the relay function, which will serve other network elements below this router A. The relay function must add to the relayed requests information, which identifies the unnumbered interface from where the request came. The answer from the server S should include the same information so that the relay can forward the answer to the correct client.

If on the other hand the links between the routers are numbered, all interfaces Ia,Ib,Ic,Id of a new router A are numbered as well. First, the router uses a conventional method (DHCP) to obtain an IP address for the interface that leads towards the server. To this end, the router tries all interfaces Ia,Ib,Ic,Id and the DHCP server answers via interface Ia. Thereafter, the new router A can start reserving network addresses for the other interfaces Ib,Ic,Id. Preferably, a new router A always requests network addresses for the same size of networks for all of the interfaces Ib,Ic,Id. This way, the server does not have to keep pools of different sizes of network. When the router A has received the network addresses for the remaining interfaces, it configures the addresses to the interfaces and start its relay function. In this case, the relay function can use the same method to identify the interface of requests and answers as a DHCP relay function, because all links have IP network addresses.

The method relating to numbered links between routers employed in the network of figure 1 will be better understood with the following explanations to figures 2 to 4.

- 12 -

Figure 2 shows a part of a network like the one in figure 1, comprising a server S, a router R, a new router A and a host H. The server S is provided with several configured interfaces, the only one relevant in this example being referred to in Figure 2 as I1. The server S has moreover access to a DNS database, not shown in the figure, in which reserved IP addresses are assigned to the name of the client belonging to the host for which they are reserved. The router R has at least two configured interfaces I2 and I3 and a relay function. The router A also comprises at least two interfaces I4, I5. The host H is provided with only one interface I6. The router A and the host H both have a client C functionality. In the beginning, the interfaces I4, I5, I6 of router A and host H are not configured. The shown interface I1 of the server S is connected to interface I2 of the router R. The router R is connected by its interface I3 to interface I4 of the router A. Interface I5 of the router A, finally, is connected to the only interface I6 of the host H.

The router A has just been connected to the router R of the existing IP network and was switched on. Just the same, the host H has newly been connected to the router A.

Figure 3 schematically illustrates the steps of the method of the invention applied to the situation depicted in Figure 2.

Each component of Figure 2 is represented by a vertical dotted line. From left to right, the vertical lines are assigned to the host H, the network element A, the router R and the server S.

- 13 -

The horizontal arrows between the vertical lines represent the messages exchanged between the different components.

The proceedings according to the method of the invention applied to the IP network of Figure 2 is now explained with reference to Figure 3.

The client functionality C of the network element A checks, which of its interfaces I4,I5 are useable. Since the network is an ATM network, the presence of a cell sync on interface I4 indicates that there is another element at the end of the link. Moreover, the client functionality C checks, whether the elements reachable via interfaces I4 are configured or unconfigured by using an address resolution message (e.g. InATMARF) to evaluate the state. The signalling between network element A and host H on the one hand and network element A and router R on the other hand necessary for the checking is indicated in Figures 2 and 3 with the numbers 1 and 2 representing a first step 1 and a second step 2 carried out during the described procedure.

Interface I3 of the router R is recognised by network element A via interface I4 as being configured, interface I6 of the host H is recognised by the network element A via interface I5 as being not configured. In consequence, the client functionality C of the network element A sends a configuration request via interface I4 to interface I3 of the router R (step 3).

A relay RR running on the router R receives the request and forwards it to the server S including the IP address of the router's interface I3 (step 4).

- 14 -

The server S chooses an IP address that can be assigned to the interface I4 of the new network element A. One part of the address is necessarily the address of the subnetwork of the router's R interface I3 that was added by the relay RR of router R to the forwarded configuration request. The other part is one of a defined number of addresses provided for the particular subnetwork and which is not yet in use. The server S maintains for this purpose a database in which is stored for each subnetwork which addresses are allocated and which are still available. The database equally provides information on which subnetworks are allocated and which are still available.

The server S outputs a response including the chosen IP address via its interface I1 (step 5). The server may include other configuration parameters for the network element A in the response. In addition, the server S updates the DNS database so that the new network element A can be addressed by name.

The relay RR of the router R receives and forwards the response of the server S to the network element A via the interfaces I2 and I3 (step 6). Also at this point, additional configuration data relevant for the particular subnetwork may be included in the response to the new network element A.

The new network element A receives the response and applies the IP address included in the response on the used interface I4. In case other parameters had been included in the server's S response, they are also utilised for configuration.

- 15 -

The new network element A can now start its relay functionality RA, as depicted in Figure 4.

The network element A checks, if one of its interfaces I5 currently not supplied with an IP address could be in usage. It recognises or knows that interface I5 (steps 7 and 8) is numbered, but the subnet address is not yet allocated. A configuration request for interface I5 is therefore sent via the local relay RA of the network element A (step 9) and the connected network N, which may consist of a plurality of routers R (step 10) to the server S, the routers R not being shown in this figure. The configuration request indicates that a new subnetwork has to be used. The server S first chooses and reserves an address for a new subnetwork that is still available according to a consultation of the proper database. Thereafter, the server S chooses and reserves an IP address for interface I5, composed of the address of the new subnetwork and of a part identifying the interface I6 within the new subnetwork and sends it back via the network N and the relay RA of network element A to the interface I5 (step 11). The IP address chosen by the server S is applied to interface I5, this interface I5 being configured as well thereupon.

In the following, interface I6 of the host H still has to be configured. The host H recognises by a check with an InATMARP message that interface I5 of the network element A is configured and sends a configuration request to the server S via the relay RA of the network element A. This time, the relay RA of the network element A includes the address of the subnetwork of its interface I5 in the request. The further proceeding is the same as described for the configuration of the first interface I4 of the network element A.

- 16 -

In order to enable the operator to watch over the address usage in the network, there is provided a documentation tool.

531 Rec'd PCT/F

09 JAN 2002

SC/wy/pw 990731WO

08. May 2000

CLAIMS

1. Method for an automatic assignment of IP (internet protocol) addresses to the interfaces of network elements (A), especially routers, having at least two interfaces (I4,I6), by one of which they are newly connected, either directly or via other network elements (R), to a server (S) of an IP based network, characterised in that the method comprises the steps of:

- a) checking by said new network element (A), which of its interfaces (I4,I5) is connected to the server;
- b) said new network element (A) sending a configuration request via its interface (I4) linked to the server;
- c) the server (S) of the network receiving the request, choosing and reserving as many IP addresses as needed for the new network element (A), and sending out a response with said IP addresses to the new network element (A);
- d) the new network element (A) receiving said IP addresses and applying them on its interfaces requiring an address.

2. Method according to claim 1, characterised in that the new network element (A) is connected to the server (S) via other network elements (R), said other network elements (R) comprising at least two interfaces and a relay function for the address reservation protocol, the relay function knowing the location in particular the IP address of the server (S).

3. Method according to claim 1, characterised in that the new network element (A) starts its relay

- 2 -

functionality after at least one IP address or IP network address has been assigned.

4. Method according to claim 1, characterised in that additional information or parameters are included in the server's (S) response to a configuration request from a new network element (A) beside the IP address, either by the server (S) or by the relay (R) of a network element (R) the response has to pass.

5. Method according to claim 1, characterised in that all network elements of the network that are routers run a routing protocol to exchange routing information in particular an Open Shortest Path First(OSPF) routing protocol.

6. Method according to claim 1, characterised in that if the new network element comprises interfaces for numbered links, in particular for Logical IP Subnetworks (LIS) the new network element requests an IP network address for each of those interfaces from the server (S).

7. Method according to claim 1, characterised in that if the new network element only comprises interfaces for unnumbered links, the new network element requests only one IP host address from the server (S).

8. IP (internet protocol) network comprising at least one server (S) and network elements (A) with more than one interface, characterised in that said network elements (A) are suitable for employing the method according to one of claims 1 to 7.

9. IP (internet protocol) network according to claim 8, characterised in that each network element (A) with more than one interface (I2,I3) comprises a client (C) for checking if its interfaces (I4,I5) are connected directly or via another network element (R) to the server (S) and for sending a configuration request to the server (S), in that each network element (R) with more than one interface (I2,I3) comprises a relay (RR) for forwarding configuration requests coming in via one of the interfaces (I3) via another one of the interfaces (I2), and in that the server (S) comprises means for choosing and reserving IP addresses for a network element (A) newly included in the network in response to a received configuration request from this new network element (A).
10. IP network according to claim 8, characterised in that it is suitable for using the Dynamic Host Configuration Protocol (DHCP) for assigning IP addresses to the interfaces of the new network elements (H), in particular to IP hosts.
11. IP network according to claim 8, characterised in that the network is made up of point-to-point links between the network elements (S,H,R).
12. IP network according to claim 8, characterised in that the server (S) has access to a database, in particular a database maintained by the server indicating which IP addresses are allocated and which IP addresses are available.
13. IP network according to claim 8, characterised in that the server (S) has access to a database, in particular a domain name service (DNS) database, in which

all reserved IP addresses are related to the name of the network element (A) to which the IP address is assigned.

14. IP network according to claim 8, characterised in that ATM is used as data link layer.

SC/wy/pw 990731WO

08. May 2000

Summary

The invention relates to a method for an automatic assignment of IP addresses to the interfaces of network elements having at least two interfaces, by one of which they are newly connected, either directly or via other network elements, to a server of an IP based network. To minimise the necessary manual configuration when a network element with at least two interfaces is newly connected to an IP based network, under following steps are proposed:

- Checking by said network element, which of its interfaces is connected to the server;
- said network element sending a configuration request via its interface linked to the server;
- the server of the network receiving the request, choosing and reserving as many IP addresses as needed for the new network element, and sending out a response with said IP addresses to the new network element;
- the new network element receiving said IP addresses and applying them on its interfaces requiring an address.

For the publication is provided Fig. 2.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number
WO 01/86908 A1

(51) International Patent Classification?: H04L 29/06

(21) International Application Number: PCT/EP00/04147

(22) International Filing Date: 10 May 2000 (10.05.2000)

(25) Filing Language: English

(26) Publication Language: English


(71) Applicant (for all designated States except US): NOKIA
NETWORKS OY [FI/IT]; Keilalahdentie 4, FIN-02150
Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AALTO, Mika
[FI/DE]; Karl-Esser-Weg 5, D-40882 Ratingen (DE).
MAJOR, Tamas [DE/DE]; Retherstrasse 1, D-40233
Düsseldorf (DE).(74) Agent: COHAUSZ & FLORACK; Kanzlerstrasse 8a,
D-40472 Düsseldorf (DE).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

(54) Title: METHOD FOR AN AUTOMATIC ALLOCATION OF IP ADDRESSES

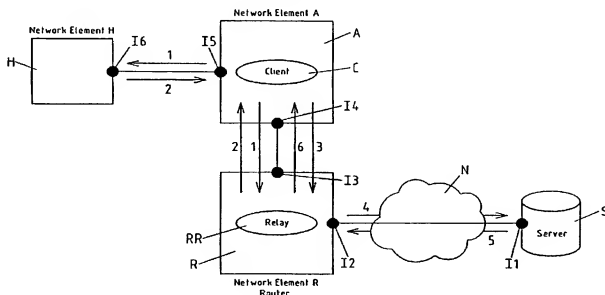

(57) Abstract: The invention relates to a method for an automatic assignment of IP addresses to the interfaces of network elements having at least two interfaces, by one of which they are newly connected, either directly or via other network elements, to a server of an IP based network. To minimise the necessary manual configuration when a network element with at least two interfaces is newly connected to an IP based network, under following steps are proposed: checking by said network element, which of its interfaces is connected to the server; said network element sending a configuration request via its interface linked to the server; the server of the network receiving the request, choosing and reserving as many IP addresses as needed for the new network element, and sending out a response with said IP addresses to the new network element; the new network element receiving said IP addresses and applying them on its interfaces requiring an address.

1/4

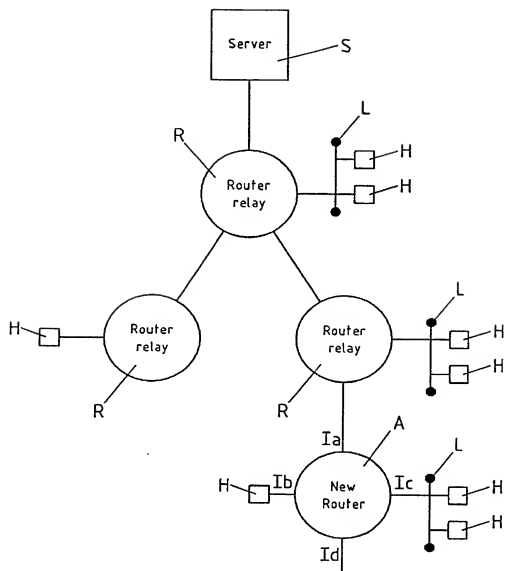


Fig.1

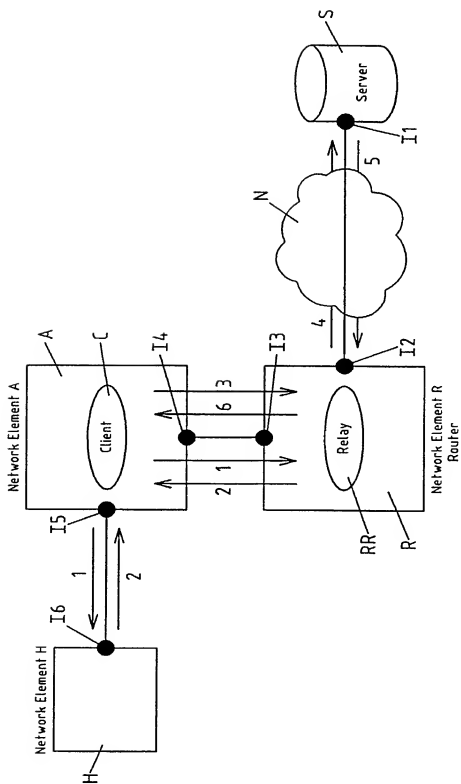


Fig 2

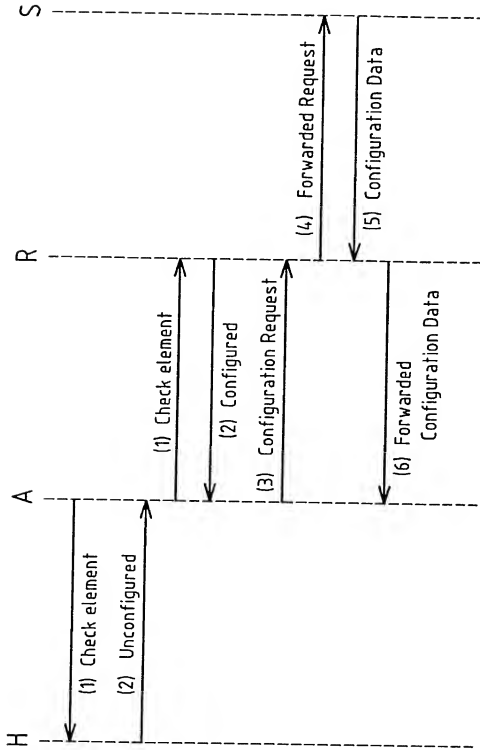


Fig.3

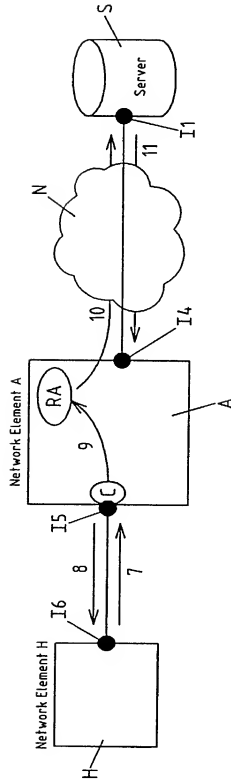


Fig. 4

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
 Includes Reference to PCT International Applications

 Attorney's Docket
 No. 4925-196PUS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR AN AUTOMATIC ALLOCATION OF IP ADDRESSES

the specification of which (check only one item below)

☐ is attached hereto

☐ was filed as United States application

Serial No. _

on _

and was amended

on _ (if applicable).

☒ was filed as PCT international application

 Number PCT/EP00/04147

 on 10 May 2000

and was amended under PCT Article 19

on _ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
PCT	PCT/EP00/04147	10 May 2000	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

Combined Declaration for Patent Application and Power of Attorney (Continued)
(Includes Reference to PCT International Applications)

Attorney's Docket No.
4925-196PUS

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS			STATUS (check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			
PCT/EP00/04147	10 May 2000			x	

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (List name and registration number)

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD WEISZ, Reg. No. 37,257; VINCENT M. FAZZARI, Reg. No. 26,879; JULIA S. KIM, Reg. No. 36,567; ALFRED FROEBICH, Reg. No. 38,887; ALFRED H. HEMINGWAY, JR., Reg. No. 26,736; KENT H. CHENG, Reg. No. 33,849; YUNLING REN, Reg. No. 47,019; ROGER S. THOMPSON, Reg. No. 29,594; BRICE FALLER, Reg. No. 29,532; DAVID J. ROSENBLUM; Reg. No. 37,709; TONY CHEN, Reg. No. 44,607; ELI WEISS, Reg. No. 17,765.

18

Send correspondence to:

Michael C. Stuart
Reg. No. 35,698
Cohen, Pontani, Lieberman & Pavane
551 Fifth Avenue, Suite 1210
New York, New York 10176

Direct Telephone calls to:

(name and telephone number)
Michael C. Stuart
(212) 687-2770

201	FULL NAME OF INVENTOR <u>1-00</u>	FAMILY NAME <u>AALTO</u>	FIRST GIVEN NAME <u>Mika</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>ESPOO</u>	STATE OR FOREIGN COUNTRY <u>FINLAND</u> <u>FI</u>	COUNTRY OF CITIZENSHIP <u>Finland</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>KISKOTTAJANKUJA 3F48</u>	CITY <u>ESPOO</u>	STATE & ZIP CODE/COUNTRY <u>FIN-02660 FINLAND</u>
202	FULL NAME OF INVENTOR <u>2-0</u>	FAMILY NAME <u>MAJOR</u>	FIRST GIVEN NAME <u>Tamas</u>	SECOND GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY <u>Düsseldorf</u>	STATE OR FOREIGN COUNTRY <u>Germany</u> <u>DE</u>	COUNTRY OF CITIZENSHIP <u>Finland Germany</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Rotherstrasse 1</u>	CITY <u>Düsseldorf</u>	STATE & ZIP CODE/COUNTRY <u>D-40472 Germany</u>

Mettmann Str. 1

D-40283

Combined Declaration for Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)			Attorney's Docket No. 4925-196PUS
2 0 3	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME
	RESIDENCE, CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY
STATE & ZIP CODE/COUNTRY			
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>			
SIGNATURE OF INVENTOR 201		SIGNATURE OF INVENTOR 202	
DATE		DATE	